

# PATENT SPECIFICATION

DRAWINGS ATTACHED

Inventor: GEORGE CAMAC

854,763



Date of filing Complete Specification March 10, 1958.

Application Date Dec. 10, 1956.

No. 37718/56.

Complete Specification Published Nov. 23, 1960.

Index at acceptance:—Classes 99(1), G4I(2: 5); and 99(2), K1.

International Classification:—F06L.

## COMPLETE SPECIFICATION

### Improvements relating to Gas Tight Couplings

We, A. E. I.—JOHN THOMPSON NUCLEAR ENERGY COMPANY LIMITED, a British Company having its registered office at Crown House, Aldwych, London, W.C.2, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to gas tight couplings and is more particularly concerned with apparatus for making a temporary gas tight coupling.

The invention has an important application *inter alia* in nuclear reactors which have a gas coolant and may be employed for coupling apparatus for gaining access to a fuel channel without causing appreciable loss of coolant gas from the fuel channel. Examples of such requirements are in the apparatus described in co-pending Application No. 6586/57 (Serial No. 854,764) in which it may be used when connecting the chute mechanism or the charging mechanism, as described therein.

The invention, however, is not limited to nuclear reactors but has other uses where a temporary gas tight coupling has to be made quickly.

According to the present invention a pair of ducts to be coupled are provided with chamfered mating surfaces adapted to form an annular joint when abutting, servo apparatus carried on one of the ducts and adapted to operate hook members to engage a flange collar, or the like on the other duct so as to draw it into abutment with the first duct together with channelling extending around at least one of the annular mating surfaces and means for feeding gas under pressure to said channelling when the joint is made and means responsive to the gas pressure produced in said channelling to

indicate the efficiency of the seal and/or initiate a control action in the event of failure of the seal.

In apparatus embodying the invention there may be a number of servo devices distributed around one of the duct ends, each servo device operating one or more hook members to engage a flange on the second duct.

According to a preferred embodiment the hook members are arranged in pairs each operated by the same servo device.

In order that the invention may be more clearly understood reference will now be made to the drawings accompanying the provisional specification, in which:—

Figs. 1 and 2 show general views of joints embodying the invention.

Fig. 3 shows the arrangement of the leakage indicating apparatus.

Fig. 4 is a detail view to an enlarged scale of one of the hook devices in the disengaged position.

Fig. 5 is a side view of the device shown in Fig. 6.

Fig. 6 is a view corresponding to Fig. 4 showing the apparatus in the engaged position.

Fig. 7 is a detail view being a part section on the line VII—VII of Fig. 5.

Fig. 8 is a detail perspective view showing the arrangement of the supply ducts to the servo cylinders.

Referring first to Fig. 1 the reference 1 indicates one of the ducts which is formed with a coupling flange 2 whilst 3 is the other duct which is similarly formed with a coupling flange 4. The flanges 2 and 4 are clamped together by a number of clamping devices 5 which are distributed around the joint. These are mounted on the first duct 1 and operate hook members 6 which engage with the under surface of the lower flange 4 so as to draw this upwards against the top flange and make the joint. The clamp

[Pn]

devices are operated by servo motors fed through supply pipes 7, 8 which extend annularly around the coupling and are connected through pipes 9 and 10 respectively to a control valve 11.

Fig. 2 shows two couplings, indicated by the references 12 and 13 each of which is similar to the coupling shown in Fig. 1. In the case of the top coupling 12 the servo elements are mounted on the duct 14 and the hooks engage a flange 15 whilst similarly the lower coupling 13 comprises servo elements mounted on a duct 16 and engaging a flange 17. The two flanges 15 and 17 are coupled together by a length of flexible hosing 18. The two couplings are independently operated from control valves indicated by the rectangles 11 and 11<sup>1</sup> respectively.

Fig. 3 shows the arrangement of Fig. 1 in greater detail. The joint surface between the two flanges is indicated by the line 19; jointing seals 20 are provided in this surface. At the same time an annular channel 21 extends around the mating face on the end of the flange 2 of duct 1. When the joint is made this channel is charged with gas from a supply 22 through a valve 23, the valve is then closed and the pressure is then observed on a gauge 24. If the joint is correctly made and there is no excess leakage then the pressure will be maintained. If, however, there is excess leakage and the joint is incorrectly made then the resulting drop in pressure will be shown by the indicator 24. As an alternative to the indicator, or in addition thereto, alarm apparatus may be provided and in the case of a coupling to a reactor fuel channel, as above described, safety apparatus may prevent opening of the coupling or if leakage should develop whilst the operation is being carried out then safety apparatus may be actuated whereby any parts inserted, such as fuel grabs, may be automatically and immediately removed from the fuel channel.

In the arrangement shown in Figs. 4-7 the flanges of the two pipes to be coupled are held together by hook members which are distributed around the coupling and arranged in pairs each pair being operated by a separate servo device. The hook members, indicated by the reference 26, are pivoted at 27 on brackets 28 projecting from the upper flange 2. The hook members 26 are provided with adjustable stops 29 which, as shown in Fig. 6, engage the flange 4. The hook members are also coupled by way of links 30 with the plates 31 which are pivoted at 32 on brackets 33 projecting from the duct walling 1. Servo devices 34 are pivoted at 35 on the ends of the brackets 28; these servo devices have plungers 36 which are coupled through rods 37 with the plates 31 to which they are pivoted at 38.

It will be observed that the plunger 36 is formed with a passage 39 which couples with a flexible supply duct 40 at the junction point 41. This enables pressure to be applied to the underneath of the plunger 36 in a more convenient manner since it will be appreciated that the servo device has to pivot a slight amount between the position shown in Figs. 4 and 6. Pressure to the upper side of the piston 36 is applied through a second flexible pipe 42, shown in Fig. 7, which does not appear in Fig. 5 as it is immediately behind the rod 37.

Fig. 8 shows how the supply ducts to the servo mechanism are arranged. It will be observed that the flexible pipe 40 shown in Fig. 5 actually constitutes the line 7 of Fig. 1.

Clearly modifications can be introduced, for instance, the hook member 26 could comprise a pair of interconnected members in different axial planes, one member being pivoted to the link 30 and the other carrying the stop 29. Moreover, the linkage could be so arranged that in moving between the Fig. 4 and Fig. 6 position the pin joining plate 31 and link 30 moves over a dead centre so that the joint will be held in engagement without the necessity for maintaining the fluid pressure in the servo motor. In such a case resilience may be introduced, for instance, the hook member 26 could be replaced by a pair of members as above described one of which is slightly resilient or the link 30 could be made longitudinally resilient, e.g. of a pair of telescopic members spring pressed apart.

#### WHAT WE CLAIM IS:—

1. A coupling between a pair of ducts comprising chamfered mating surfaces extending around the ends of the ducts adapted to form an annular joint when abutting, servo apparatus carried on one of the ducts and adapted to operate hook members to engage a flange, collar or the like on the other duct so as to draw it into abutment with the first duct, together with channelling extending around at least one of the annular mating surfaces and means for feeding gas under pressure to said channelling when the joint is made and means responsive to the gas pressure produced in said channelling to indicate the efficiency of the seal and/or initiate operation of safety apparatus in the event of failure of the seal.

2. A coupling as claimed in Claim 1 in which there are a number of servo devices distributed around one of the duct ends, each servo device operating one or more hook members to engage a flange on the second duct.

3. A coupling as claimed in Claim 2 in which the hook members are arranged in pairs, both hook members of each pair being operated by the same servo device.

4. In a gas cooled nuclear reactor a gas

5 tight connection between a duct in a fuel  
charging machine and a fuel channel com-  
prising a length of flexible hose through  
which the fuel elements pass, a disconnectible  
coupling at one end of the hose adapted  
for coupling the hose to a fuel channel in  
the reactor and a disconnectible coupling at  
the other end of the hose adapted for coupling  
the hose to the charging machine, each of  
10 said couplings being as claimed in any one  
of the preceding claims.

5. A gas tight coupling for coupling a  
charging machine to a fuel channel of a  
nuclear reactor substantially as herein de-  
scribed with reference to the drawings  
15 accompanying the provisional specification.

J. W. RIDDING,  
Chartered Patent Agent,  
Crown House, Aldwych,  
London, W.C.2,  
Agent for the Applicants.

## PROVISIONAL SPECIFICATION

### Improvements relating to Gas Tight Couplings

We, A. E. I.—JOHN THOMPSON NUCLEAR  
ENERGY COMPANY LIMITED, a British  
Company having its registered office at Crown  
House, Aldwych, London, W.C.2, do hereby  
20 declare this invention to be described in  
the following statement:—

This invention relates to gas tight couplings  
and is more particularly concerned with  
25 apparatus for making a temporary gas tight  
coupling.

The invention has an important application  
*inter alia* in nuclear reactors which have a  
gas coolant and may be employed for coupling  
30 apparatus for gaining access to a fuel channel  
without causing appreciable loss of coolant  
gas from the fuel channel. Examples of  
such requirements are in the apparatus  
described in co-pending Application No.  
35 6586/57 (Serial No. 854,764) in which it may  
be used when connecting the chute mechanism  
or the charging mechanism, as described  
therein.

The invention, however, is not limited to  
40 nuclear reactors but has other uses where a  
temporary gas tight coupling has to be made  
quickly.

According to the present invention a pair  
of ducts to be coupled are provided with  
45 chamfered mating surfaces adapted to form  
an annular joint when abutting, servo appa-  
ratus carried on one of the ducts and adapted  
to operate hook members to engage a flange  
collar or the like, on the other duct so  
50 as to draw it into abutment together with  
channelling extending around at least one of  
the annular mating surfaces and means for  
feeding gas under pressure to said channelling  
when the joint is made and means for  
55 observing the gas pressure produced in said  
channelling to determine the efficiency of  
the seal.

In apparatus embodying the invention there  
may be a number of servo devices distributed  
60 around one of the duct ends each operating  
one or more hook members to engage a flange  
on the alternate duct.

According to a preferred embodiment the  
hook members are arranged in pairs each  
65 operated by the same servo device.

In order that the invention may be more  
clearly understood reference will now be made  
to the accompanying drawings, in which:—

Figs. 1 and 2 show general views of joints  
embodying the invention.

Fig. 3 shows the arrangement of the leak-  
age indicating apparatus.

Fig. 4 is a detail view to an enlarged scale  
of one of the hook devices in the disengaged  
70 position.

Fig. 5 is a side view of the device shown  
in Fig. 6.

Fig. 6 is a view corresponding to Fig. 4  
showing the apparatus in the engaged posi-  
80 tion.

Fig. 7 is a detail view being a part  
section on the line VII—VII of Fig. 5.

Fig. 8 is a detail perspective view showing  
the arrangement of the supply ducts to the  
servo cylinders.

Referring first to Fig. 1 the reference 1  
indicates one of the ducts which is formed  
with a coupling flange 2 whilst 3 is the  
alternate flange which is similarly formed with  
a coupling flange 4. The flanges 2 and 4  
90 are clamped together by a number of clamp-  
ing devices 5 which are distributed around  
the joint. These are mounted on the duct  
1 and operate hook members 6 which engage  
on the under surface of the lower flange 4 so  
95 as to draw this upwards against the top  
flange and make the joint. The servo motors  
are operated through supply pipes 7, 8 and  
extend annularly around the coupling and  
are connected through pipes 9 and 10  
100 respectively to a control valve 11.

Fig. 2 shows two couplings, indicated by  
the references 12 and 13 each of which is  
similar to the coupling shown in Fig. 1.  
In the case of the top coupling 12 the  
105 servo elements are mounted on the duct  
14 and the hooks engage a flange 15 whilst  
similarly the lower coupling 13 comprises  
servo elements mounted on a duct 16 and  
engaging a flange 17. The two flanges 15  
110 and 17 are coupled together by a length  
of flexible hosing 18. The two couplings  
are independently operated from control

valves indicated by the rectangles 11 and 11<sup>1</sup> respectively.

Fig. 3 shows the arrangement of Fig. 1 in greater detail. The joint surface between the two flanges is indicated by the line 19, the jointing seals 20 are provided in this surface. At the same time an annular channel 21 extends around the mating face on the end of the flange 2 of duct 1. When the joint is made this is charged with gas from a supply 22 through a valve 23, the valve is then closed and the pressure is then observed on a gauge 24. If the joint is correctly made and there is no excess leakage then the pressure will be maintained. If, however, there is excess leakage and the joint is incorrectly made then the resulting drop in pressure will be shown by the indicator 24. As an alternative to the indicator, or in addition thereto, alarm apparatus may be provided and in the case of a coupling to a reactor fuel channel, as above described, control apparatus may prevent opening of the valve or if leakage should develop whilst the operation is being carried out then any parts inserted, such as fuel grabs, may be automatically and immediately removed from the fuel channel.





In the arrangement shown the flanges of the two pipes to be coupled are held together by hook members which are distributed around the coupling and arranged in pairs each pair being operated by a single servo device. The hook members, indicated by the reference 26, are pivoted at 27 on brackets

28 projecting from the upper flange 2. The hook members 26 are provided with adjustable stops 29 which, as shown in Fig 6, engage the flange 4. The hook members are also coupled by way of links 30 with the plates 31 which are pivoted at 32 on brackets 33 projecting from the duct walling 1. Servo devices 34 are pivoted at 35 on the ends of the brackets 28; these servo devices have plungers 36 which are coupled through rods 37 with the plates 31 to which they are pivoted at 38.

It will be observed that the plunger 36 is formed with a passage 39 which couples with a flexible supply duct 40 at the junction point 41. This enables pressure to be applied to the underneath of the plunger 36 in a more convenient manner since it will be appreciated that the servo device has to pivot a slight amount between the position shown in Figs. 4 and 6. Pressure to the upper side of the piston 36 is applied through a second flexible pipe 42, shown in Fig. 7, which does not appear in Fig. 5 as it is immediately behind the rod 37.




Fig. 8 shows how the supply ducts to the servo mechanisms are arranged. It will be observed that the flexible pipe 40 shown in Fig. 5 actually constitutes the line 7 of Fig. 1.

J. W. RIDDING,  
Chartered Patent Agent,  
Crown House, Aldwych,  
London, W.C.2,  
Agent for the Applicants.

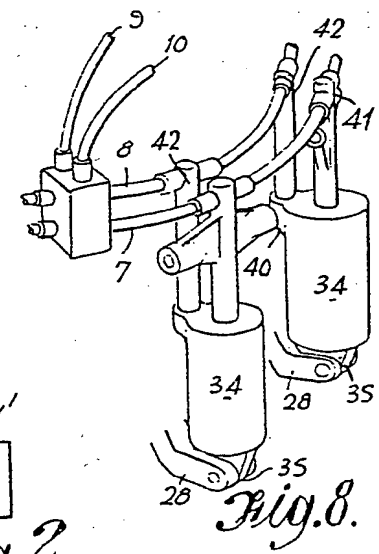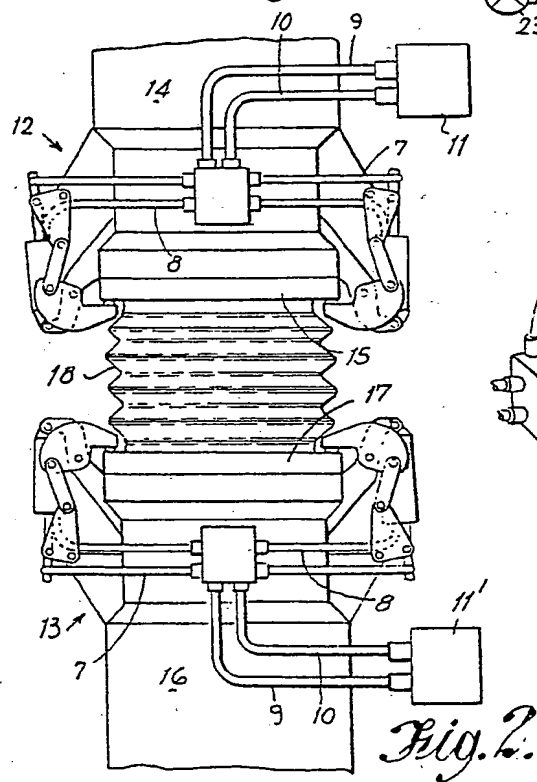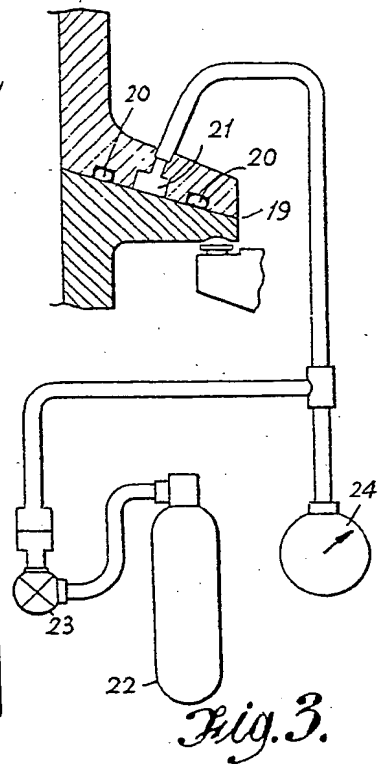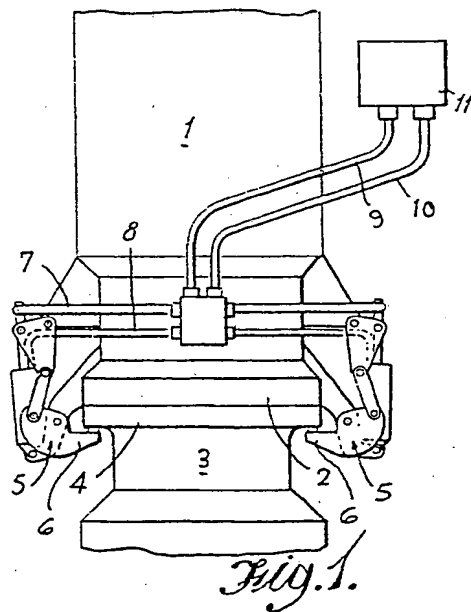


854,763  
2 SHEETS

PROVISIONAL SPECIFICATION  
This drawing is a reproduction of  
the Original on a reduced scale.  
SHEETS 1 & 2

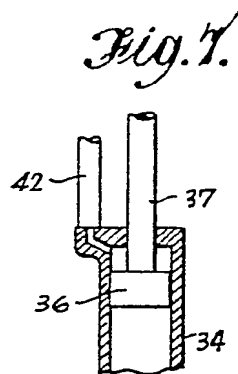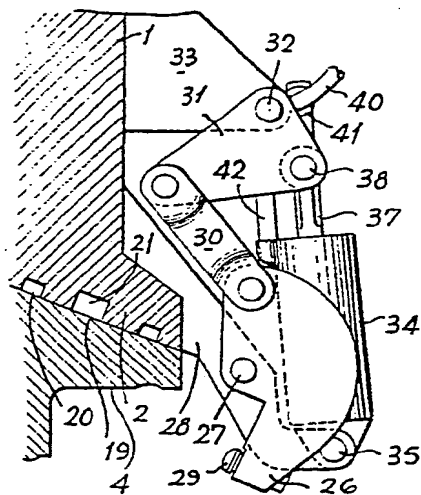


*Fig. 4.*

3.




35  
9.8.






*Fig. 6.*

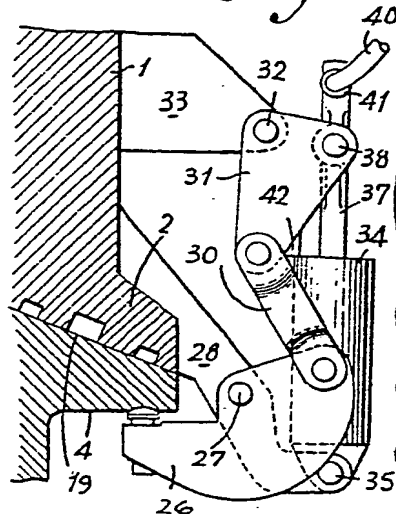

*Fig. 5.*

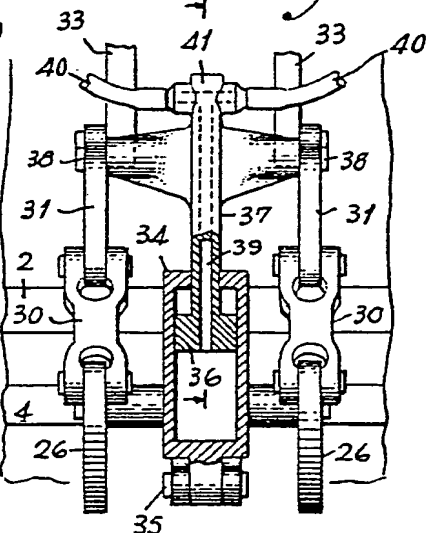

BEST AVAILABLE COPY

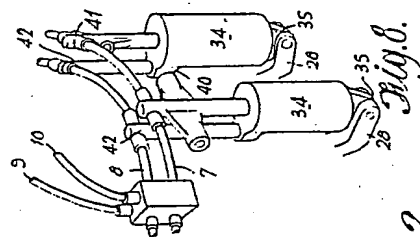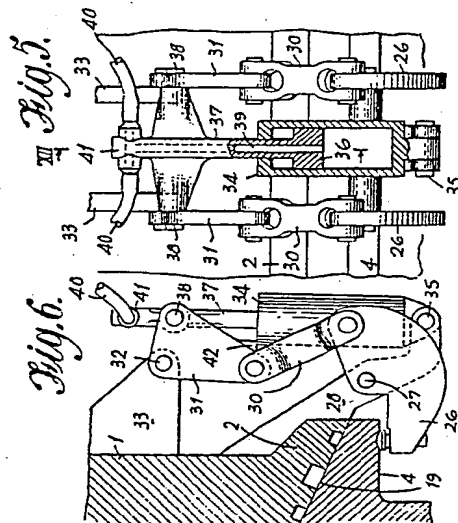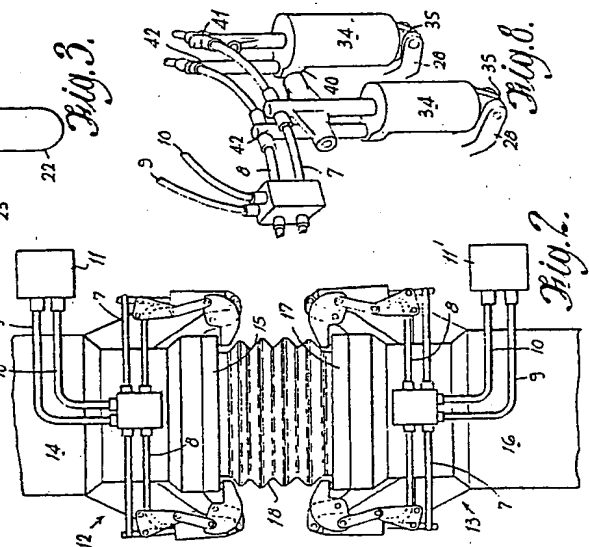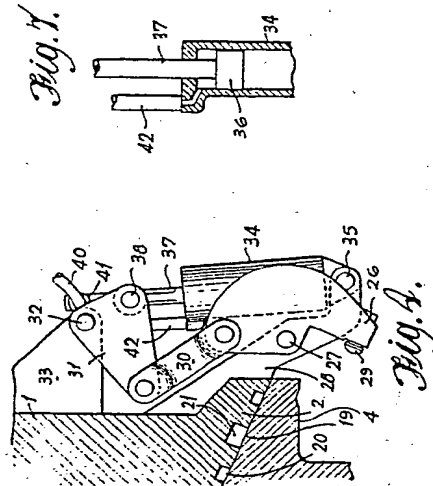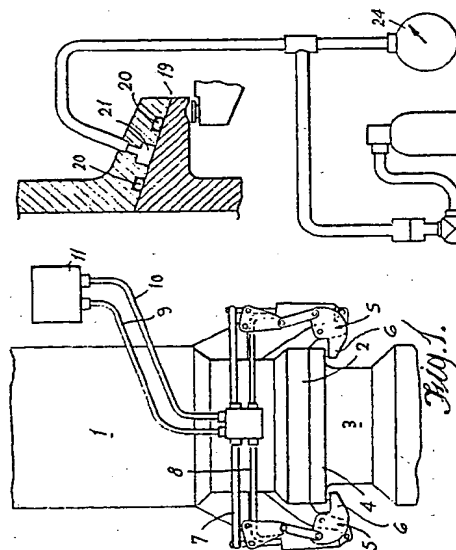

BEST AVAILABLE COPY

**THIS PAGE BLANK (USPTO)**